

nifty



HR12 4x4

**SELF PROPELLED
ACCESS PLATFORM**



12.25m (40ft 2in)
Working height

6.10m (20ft 1in)
Working outreach

Telescopic Upper Boom

Greater accuracy when
positioning platform

Bi-Energy Available

Optimising Utilisation

Weight Under 3.4 Tonnes

Low cost transportation

Fully Proportional Hydraulic Controls

Simple, reliable &
easy to maintain

Slide-Out Canopy

Faster, easier access to engine



niftylift.com




nifty

Heightrider 12 4x4

With its compact dimensions and class-leading working envelope, the Height Rider 12 has always been versatile and reliable, but add to this a low weight chassis and a powerful 4-Wheel-Drive system and you've got the **Height Rider 12 4x4** - one of the most complete 12m (40ft) work platforms available. Its telescopic upper boom provides increased accuracy when positioning the platform and Nifty's trade-mark 'Bi-Energy' option allows the **HR12 4x4** to work in a wide range of environments.

SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark



Articulating booms and 6.10m outreach make the **HR12 4x4** perfect for reaching up and over all kinds of obstacles.





The **HR12 4x4's** deep tread rough terrain tyres provide extra grip even on soft ground.

SPECIFICATIONS

Working Height	12.25m	40ft 2in
Platform Height	10.25m	33ft 8in
Working Outreach	6.10m	20ft 1in
Slew	360°	
Width	1.60m	5ft 3in
Height	1.94m	6ft 4in
Length	4.10m	13ft 5in
Minimum Weight	3,330kg*	7,341lbs*
Turning Radius - Inside	1.80m	5ft 11in
- Outside	3.40m	11ft 2in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.66m	3ft 8in x 2ft 2in
Drive Speed	2.2mph	3.7 kph
Gradeability	30%	
Control System	Fully Proportional Hydraulic	
Power Options	Battery Only	
	Diesel Only	
	Bi-Energy (Engine & Battery)	

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

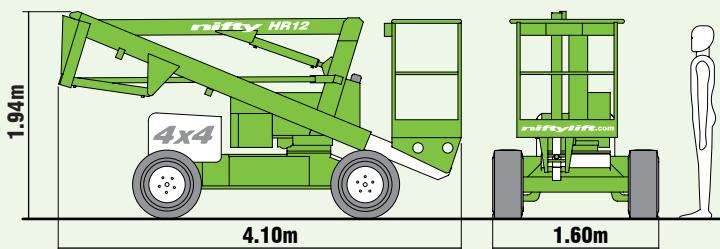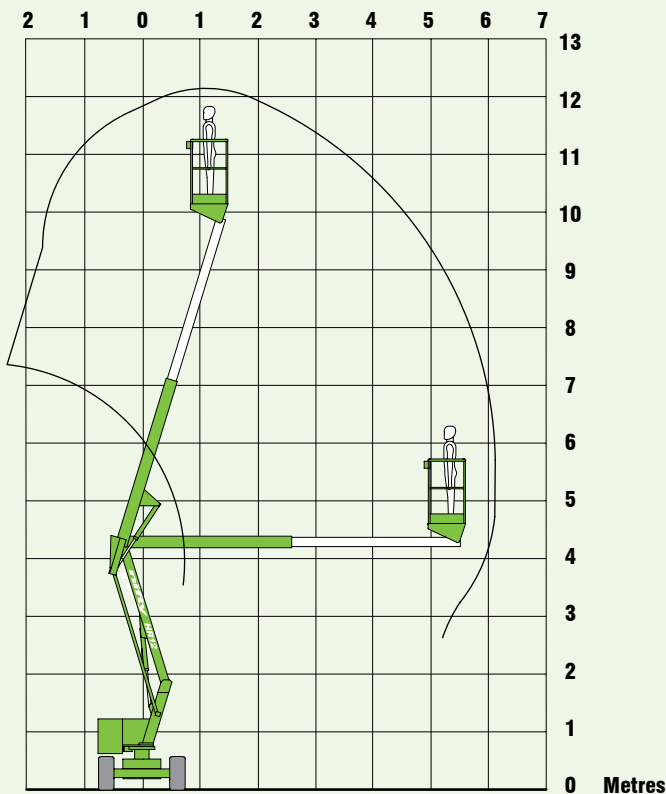

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com
e.mail: info@niftylift.com
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733

